Submitted to

Meta Global AI Developer Hackathon 2026

Indie Developer | Build for Your World | Oct 27 – Nov 4, 2026

serve · Play more. Manage less.


serve


Play more.
Manage less.

Your agent sets up your games with your friends' agents, plans around your week, and cuts your highlights. You just say yes.

- **Agents agree your week**
- **Your agent in Messenger**
- **15 Meta models: 10 on my server, 5 on the Meta Model API**

Not a coach, not a sports analyzer, not a medical tool: a club that organizes itself.

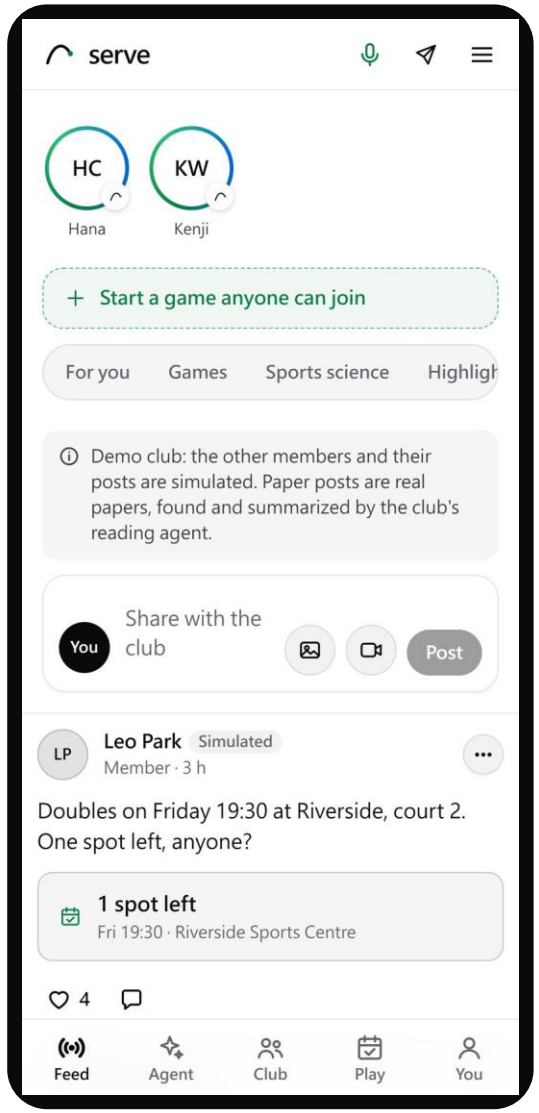

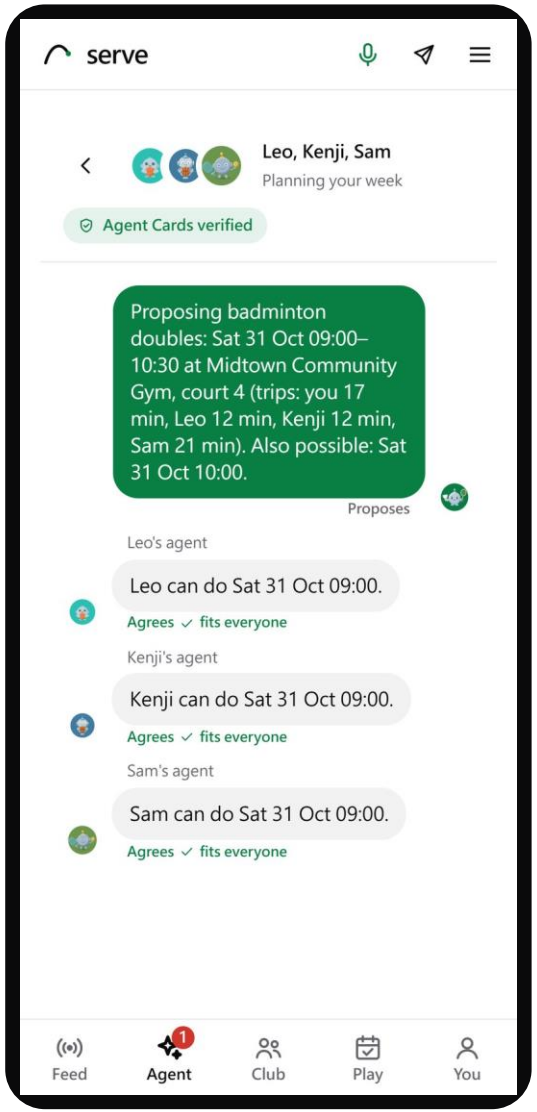

IMPACT · 30%

People don't quit the game. They quit organizing it

40% → 26%

of US adults play a sport at ages 18 to 21, then at 26 to 49

NPR, RWJF and Harvard Chan poll of 2,506 adults, 2015

WHAT STOPS ADULTS

64% other commitments come first

21% got out of the habit

10% no one to do it with


Active NZ survey, Sport New Zealand, 2023

THE PAIN	WHAT SERVE DOES
Playing takes organizing "Who's free this week?" "Is the court taken?" "We're one short." The group chat wears the fun out.	Your agent agrees the time and the court with the other players' agents. You approve once; your phone says "Game on: Thu 19:00, 4 in."
Nobody pushes you One missed week becomes a month. Apps count steps; none books your next game.	When your usual time is open and your partner is free, it asks: "Thursday 19:00: Leo is free. Want a game?"
Life gets in the way A late meeting, a heavy week, rain on an outdoor court.	It moves the game, plans one fewer in a heavy week, and checks the map, reviews and forecast.


Less screen time, more court time: any ball sport that needs people, a time and a place.

LIVE · INVITED PLAYERS

Real players, each with an agent of their own

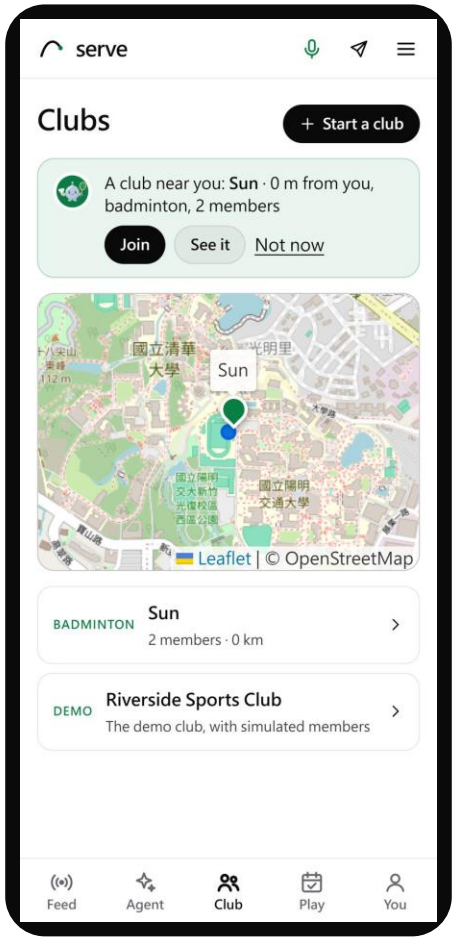

Clubs on a real map, one recommended

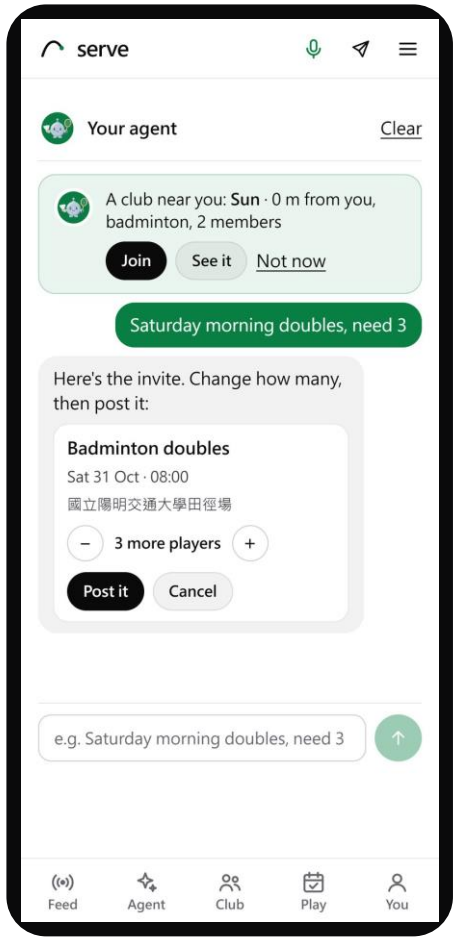

Say it; your agent drafts the invite

LIVE SINCE 29 OCT · relay-orders-eliminate-associated.trycloudflare.com

8	2	4	7
players (14 demo sign-ins)	clubs they started	games posted	joins; 2 games filled

1 An agent of their own

Each player's agent runs in its own process on my server, with its own data folder; the club, its feed and its games are shared.

2 Clubs anyone can start

Public or private, on a real map; your agent recommends the nearest public one.

3 Tell your agent the game

"Saturday morning doubles, need 3": it drafts the invite with the nearest court and you tap Post. Share it as a link: anyone opens it and joins, no account needed first.

Counted 29 Oct, day 3. Spond, Playtomic and Meetup post events or book courts; on Serve each player's agent agrees the time, so nobody runs the poll.

IMPACT · WHO ELSE IT SERVES

Games where no one has time to organise them

CHILDREN

A teacher or volunteer

Private, organiser-led. Children have no accounts: first names only, seen by the organiser. Tap who came; code shares out the courts in turns.

11 children, 2 courts: everyone plays within one turn of the others. A pick-up note for parents.

OLDER ADULTS

Gentle games

Every game posted in a gentle-games club is held by code: starts 08:00 to 16:00, 60 minutes, 8 players at most, doubles for racket sports.

A 19:00 game is refused, with the reason. The card says "Gentle game · doubles, 60 min".

A CAUSE

Charity cup

Players enter with a level and a pledge to the cause, only recorded: Serve handles no money. The organiser makes the draw in one tap.

Balanced doubles, a round robin on courts and times, no team twice in a slot; posted in the club.

All rules are code, checked in test/programs_unit.mjs. A new kind of group is a club, not a new agent.

HOW IT WORKS

One yes from you. Agents do the rest

YOUR CONTEXT

Say it once

Messenger and voice

"Not after 22:00 on work nights" · "not Tomás this week"

Your health app

Apple Health, Google Fit, GPX: your games

Meta's DRAMA

Finds what matters for this week, by meaning, recent first

YOUR SERVE AGENT

Plans your week

Muse Glimmer

Picks one tool at a time on my RTX 3090; code runs it

Llama 3.2 1B

Distilled from Glimmer: the easy calls, on the CPU

A2A with friends' agents

One round: they mark times, code picks the overlap

ON AND OFF THE COURT

You just play

One yes

In the app or with a tap in Messenger

Your highlight, auto-cut

DETR · Sapiens2 · SAM 2.1 · MapAnything


The club and your stories

Invites, stories, one tap to Instagram


Checked by code before anyone sees it · nothing is booked without your yes · health data only sets scheduling limits, on my server

TUESDAY · WEDNESDAY

Your agent plans the week and finds the court

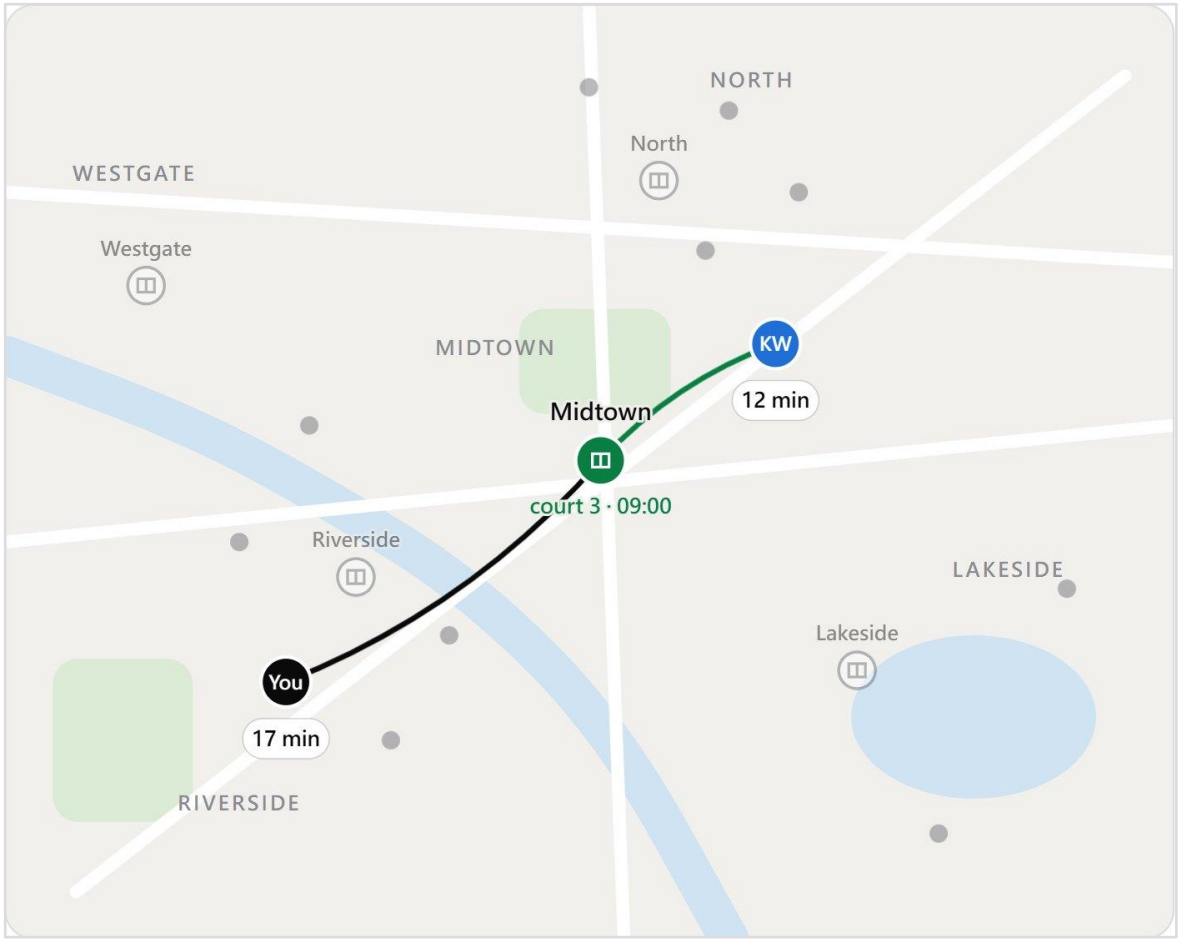

Badminton: the venue in the middle, each player's trip agreed in one round

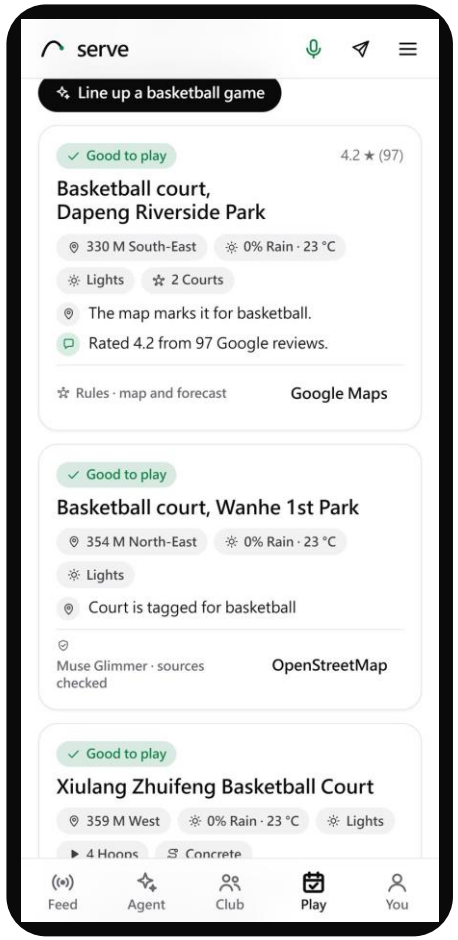

Basketball: public courts, judged with sources

Muse Glimmer plans

One tool at a time; a refused call comes back as a fact

A2A, one round

Agents mark the times that work; code picks

Prompt Guard 2


Screens Google reviews before the judge reads them

Nothing booked


until you say yes

AI TRUST

See exactly what your agent said to theirs

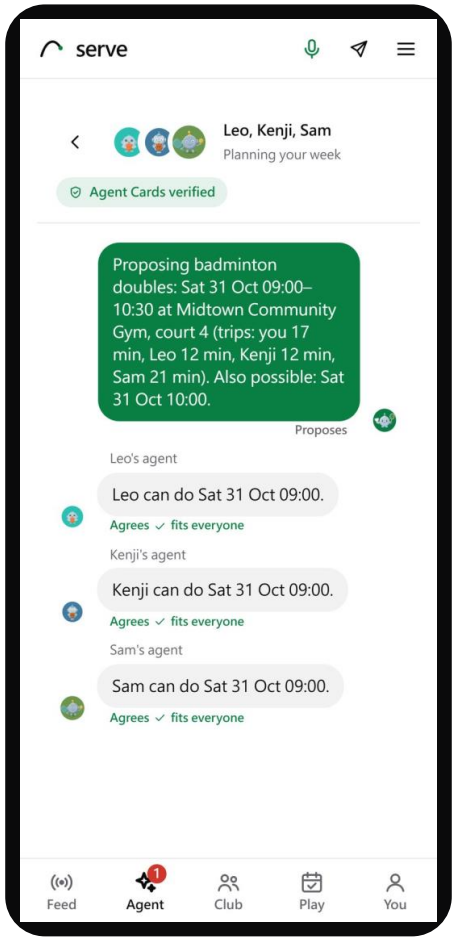

Agent chats

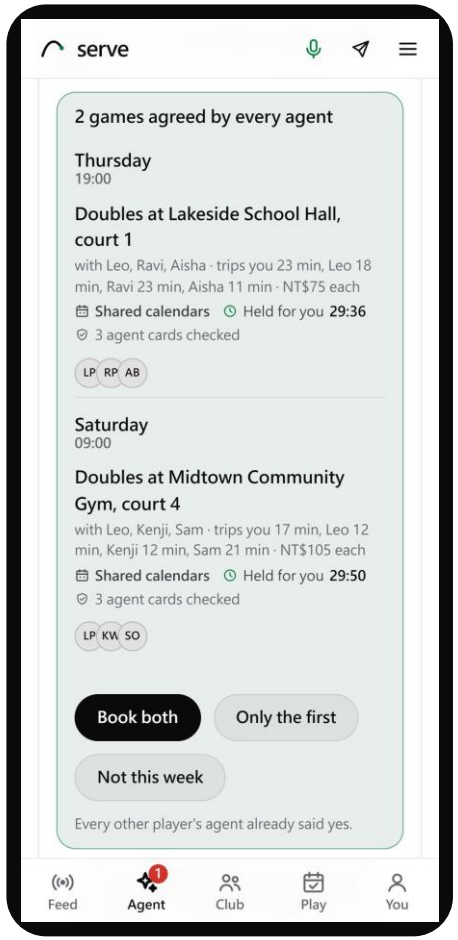

Then it asks you

Every message, word for word

The messages the agents sent each other over A2A, round by round. Not a summary.

What each one meant

Proposes, agrees, a counter-offer or declines, under every bubble.

Checked by code

"Fits everyone" means code checked it against every calendar before your agent moved on.

Whose agent, verified

Each member's Agent Card is signed and checked before your agent talks to it.

You decide

Agreed by every agent, then it waits for your yes.

USE OF META AI · 25%

15 Meta models; six carry the product

REASONING

Muse Glimmer

Every agent's decisions: the tool loop, A2A answers, the court judge

RTX 3090 · Ollama · open weights

REASONING

Llama 3.2 1B student

Distilled from Glimmer; answers alone when sure, in about 0.9 s

CPU · fine-tuned here

SAFETY

Llama Guard 3 1B

Every message in and out, a person's or an agent's

CPU · open weights

SAFETY

Prompt Guard 2

Google reviews and members' ideas, before any model reads them

CPU · 86M

MEMORY

DRAMA

Agent memory: what matters for your week, found by meaning

CPU · open weights

VOICE

Muse Voice Transcribe

Talk to your agent hands-free, and cut in while it speaks

Meta Model API · realtime

Also: DETR, Sapiens2, SAM 2.1, MapAnything (auto-cut highlights) · Omnilingual ASR (voice notes) · Muse Image (posters, agent faces) · Muse Spark (fallback) · Muse Wonder and SAM 3.1 (checks). 10 open weights on my server, 5 on the Meta Model API; all 15 in the appendix.

TECHNICAL DEPTH · 20% · FINE-TUNING

Muse Glimmer reasons a lot, so I trained a 1B student

WHAT THE LEDGER SHOWED

2,755 Muse Glimmer calls in the evaluations' ledgers

84% of its tokens were reasoning

9% came back empty: thinking off, it still reasoned in a hidden channel

So every call asks for think: "low" and leaves room to reason. And the most common choice, which time a member's agent picks, goes to a student that writes nothing.

THE STUDENT · META'S LLAMA 3.2 1B, FINE-TUNED


Teacher data
4,868 choices Muse Glimmer made through the real agent call, a separate run on a cloud A100

LoRA
Rank 16 on every projection, 3 epochs: 20 min for the 1B

A decision head
One pass: a probability per option, and its own yes or no for every time

int4 on the CPU
0.8 GB, about 0.9 s a decision, 0 tokens written

Agrees with Glimmer, 500 held-out cases (within the noise of its 88.8%)

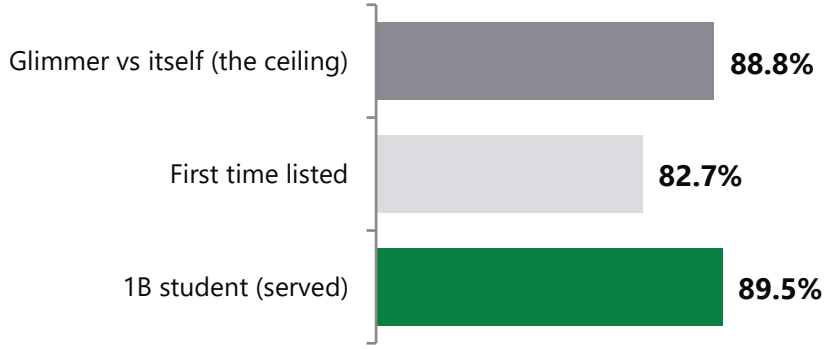

54–67%
of members' answers taken off Glimmer in simulated talks, no rule broken

29 / 32
stated preferences kept (Glimmer 27)

When the student isn't sure, Muse Glimmer answers

Code first

Calendars and hard rules; one time left: answered, no model

Llama 3.2 1B student

int4 on the CPU, about 0.9 s, no text written

Answers only if

- sure: 0.6 or more
- its reading of which times work matches code's
- the student is free within 8 s and answers within 20 s

no


yes

Muse Glimmer reasons

the full answer: about 600 tokens, 40 s at p50

The student answers

about 0.9 s on the CPU, a Glimmer call saved

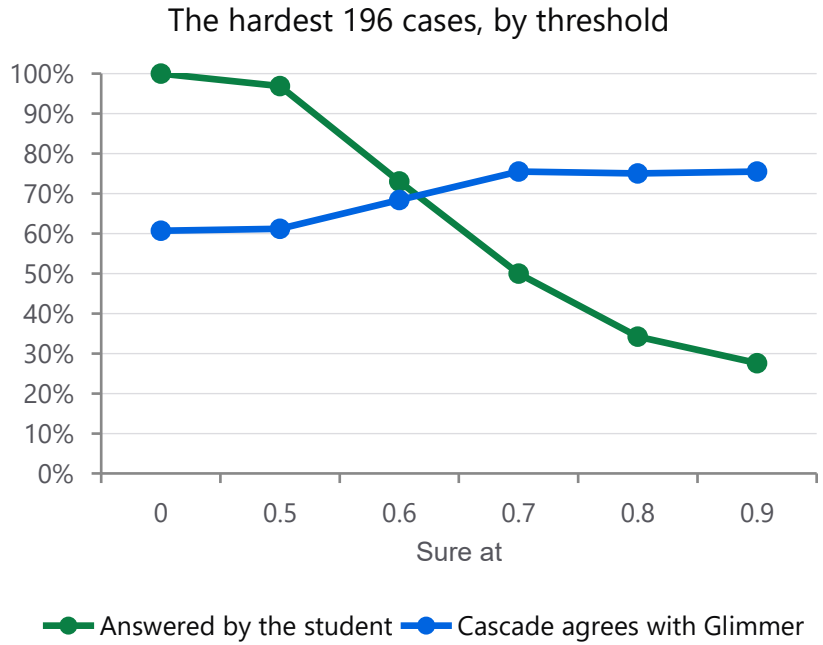

Checked by code, then sent over A2A


Whoever answered, code checks the member's hard rules again before the decision goes to the other agent, labelled with the tier that made it. Agent chats shows it under every message.

Served at 0.6

At 0.6 the student answers 96% of the 500 test cases and still agrees with Glimmer 89.9%; at 0.7 it agrees more on the hardest cases but sends more to Glimmer.

SAFETY, MEASURED


No agent holds all three at once

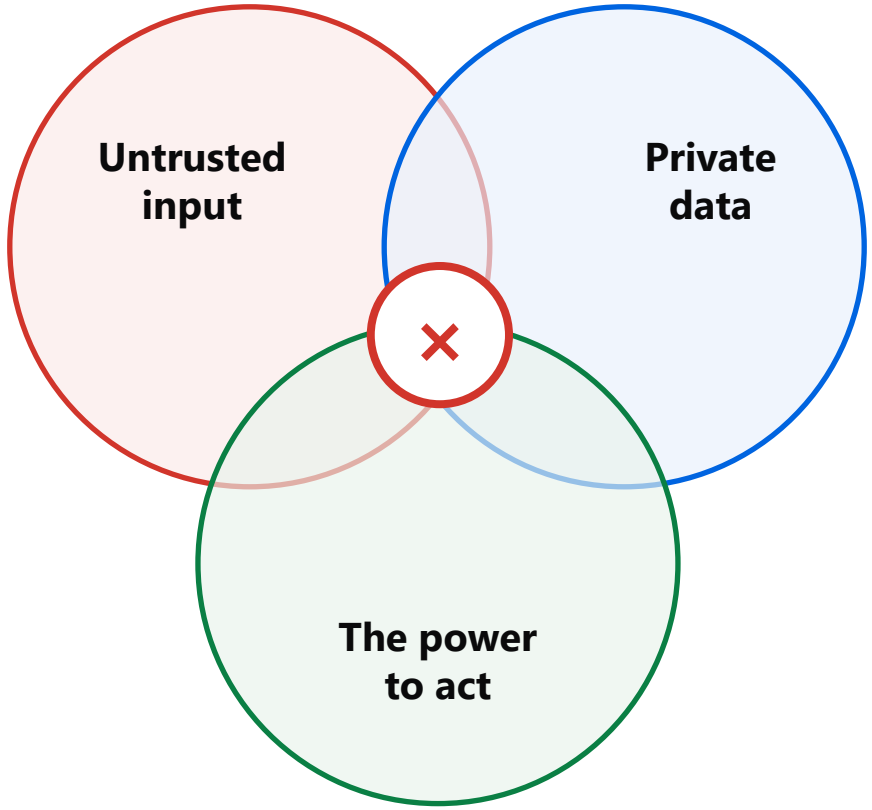

Meta's Agents Rule of Two, on every agent: the planner, members' agents, the photo reader and the community loop.

A disclosure budget

An agent that keeps asking for games can map out your week. How many of your weekdays it pins down exactly:

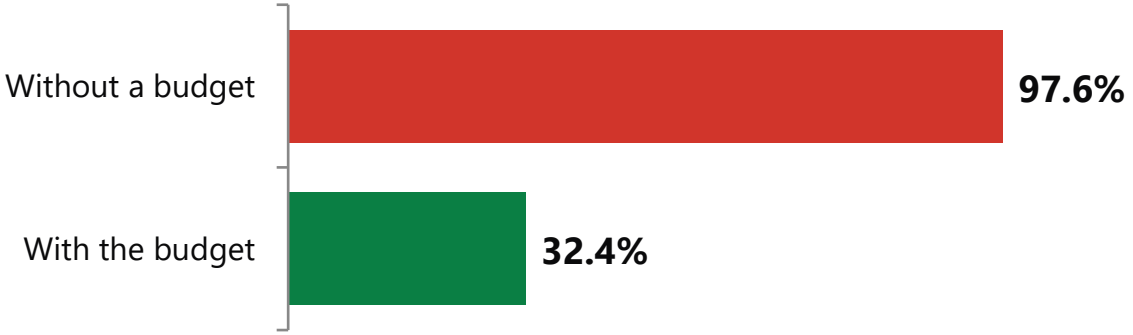

Measured with a simulated prober

93 / 93 scripted attacks stopped: injected instructions, poisoned reviews, forged Agent Cards, sock-puppet votes. Unsafe messages: 37 of 42 refused, 1 of 74 harmless ones refused.

Real players, real models; simulated test clubs

REAL

What a judge can trust as is

- 8 players, 14 accounts, 2 clubs they started, 4 games, 7 joins on the live site (29 Oct)
- Every agent's code: A2A over JSON-RPC, signed Agent Cards, holds, crash recovery
- Muse Glimmer making every decision in the evaluations; the guards, DRAMA, speech recognition
- Courts from OpenStreetMap, real forecasts; Messenger's webhook on a real Page (Facebook and Instagram login wait for Meta's app review: players use a demo sign-in)
- Highlights cut from real footage (a CC BY clip)

SIMULATED, AND LABELLED SO

Clubs built for the tests

- The demo club's members, venues and free times (marked demo in the app)
- The members in the scale, rules, matchmaking and student tests (seeds 7 and 11)
- The community loop's club of 60 and its votes
- The 20,000 requests in the asking test; the prober in the disclosure test
- The attacks and unsafe messages: labelled tests I wrote

The simulations show the agents keep what members stated; they do not show how real people react. The live club measures that.

BUILT DURING THE HACKATHON · OCT 27 – NOV 4, 2026

New here, mine from before, third party

BUILT HERE

All the code

- The gateway and every agent; A2A and its signing; matchmaking; memory and beliefs
- The community loop and its builder; the highlight pipeline's code
- The web app, members, clubs, the per-player gateways
- The Llama 3.2 1B student, fine-tuned from Glimmer's choices
- Every test and evaluation; the demo video (2:42)
- Repository history from Oct 28 (day 2), over 900 commits

MINE, FROM BEFORE

Off in this entry

- TrackNetV5, my published shuttle tracker (ICIP 2026): off by default, not loaded in this entry


THIRD PARTY, AS PUBLISHED

Models, software, data

- Meta: Muse Glimmer, Llama 3.2 1B, Llama Guard 3, Prompt Guard 2, DRAMA, Omnilingual ASR, DETR, Sapiens2, SAM 2.1, MapAnything; API: Muse Spark, Voice Transcribe, Image, Wonder, SAM 3.1
- Other models: Kokoro (speech), IBM Granite (optional), WASB (off)
- Software: A2A SDK, Ollama, Transformers, OpenTelemetry, React, Vite, Leaflet, Cloudflare tunnel
- Data: OpenStreetMap, Open-Meteo, Google Places, CC BY clips (credited)


DEMO · 25% · THE VIDEO, 2:42

What the video shows, in the running app

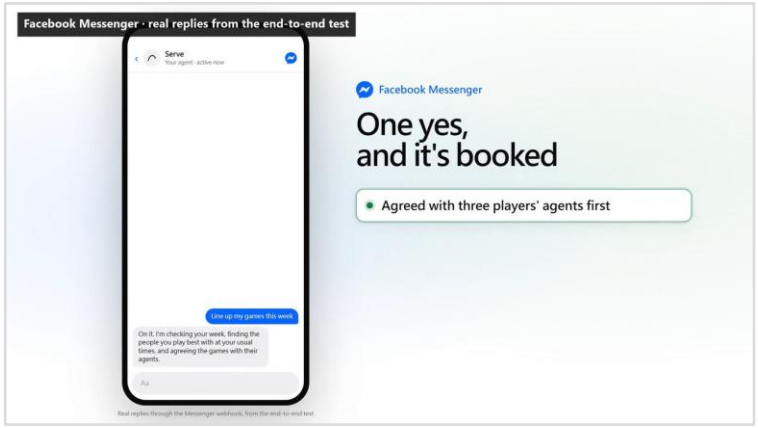


0:20

One yes in Messenger, and the game is booked (real replies from the end-to-end test)

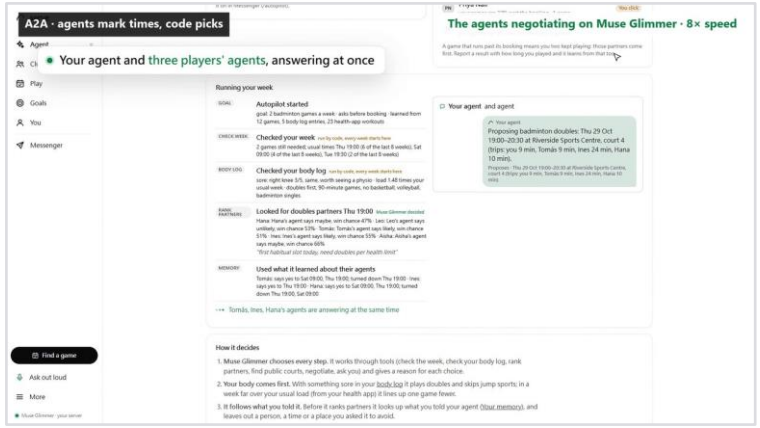

0:55

Your agent and three players' agents negotiate on Muse Glimmer (shown at 8×, labelled)

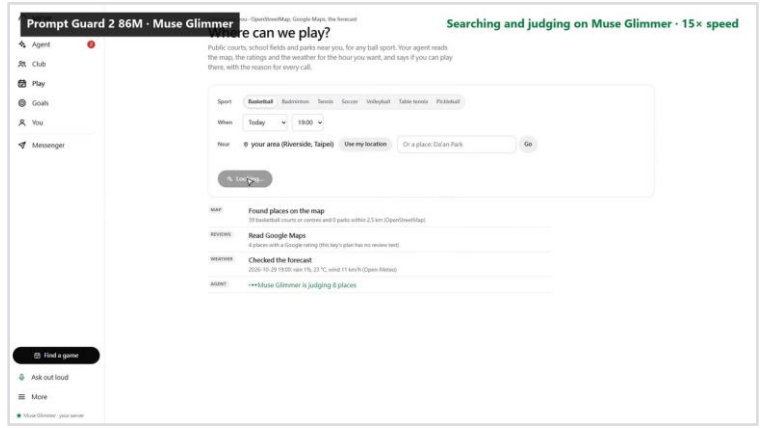

1:08

Courts found and judged with Prompt Guard 2 and Glimmer (shown at 15×, labelled)

Every speed-up is labelled on screen. The video shows only what this deck lists as built during the hackathon (slide 14).

serve

Play more. Manage less.

The agent that gets you playing, in any ball sport.

Your week, agreed agent to agent | **Your agent in Messenger** | **Auto-cut highlights to Instagram**

Built during the hackathon, Oct 27 – Nov 4, 2026 · demo video 2:42 · what is new and what is not: slide 14

github.com/gino6178/serve-meta-hackathon · live: relay-orders-eliminate-associated.trycloudflare.com

The product runs Muse Glimmer on an RTX 3090 I own; cloud A100s ran evaluations, including the A2A test's second gateway

APPENDIX

The details behind the main slides

The agent and A2A · all 15 Meta models · the social app · auto-cut highlights · posters · agents as members · voice · federated clubs · memory · agent architecture · more measurements · scale · the self-evolving club · every number and its source · the full architecture

AN AGENT, NOT A CHATBOT

Glimmer plans, agents agree, code decides

The planner agent · a tool loop

Muse Glimmer picks the next tool; code runs it with checked arguments and hands back the facts.

get_week	check_limits	recall
find_partners	find_places	negotiate
request_approval	nudge	finish

- 12 steps at most; rules finish the week if it stalls
- A refused call (a day outside the week, a member who isn't free) comes back as a fact, and it re-plans
- Replies in JSON Schemas, checked again in code; a reply that never fits is no answer, never a yes

Agent to agent · A2A v1.0

On the official SDK. One negotiation is one A2A context, and one trace.

Signed Agent Cards	Ed25519, checked before your agent talks to it
One round	Each agent marks the times that work; code picks from the overlap
Held, all or nothing	A 30-minute hold, so two talks never agree the same member twice
Survives a crash	Killed at each of five steps: booked exactly once every time

22 / 22 checks across two machines: my GPU server in Taipei and a gateway on a cloud A100

ALL 15 META MODELS

15 Meta models: 12 in the product, 3 for checks

REASONING

Muse Glimmer

Every agent: the tool loop, members' decisions, photos, courts, captions

RTX 3090 · Ollama · 4 in parallel

REASONING

Llama 3.2 1B

Distilled from Glimmer; answers alone when sure

CPU · in the app

SAFETY

Llama Guard 3 1B

What you write, what a model writes, every idea shared with the club

CPU

SAFETY

Prompt Guard 2

Google reviews before the court judge reads them; shared ideas

CPU · 86M

MEMORY

DRAMA

Agent memory: what matters for your week, by meaning

CPU

VOICE

Omnilingual ASR

Voice notes in Messenger to text

CPU · CTC 1B

VISION

DETR

Finds the people in your video, so the reel follows you

GPU

VISION

Sapiens2

Finds the moment worth sharing in your clip

GPU · 0.4B

VISION

SAM 2.1

Cuts each player out for the spotlight and the drawn view

GPU · Hiera-L

3D

MapAnything

Depth and the camera for the orbit camera effect

GPU · optional effect

META MODEL API

Muse Spark 1.3

The fallback when my GPU can't answer; the builder's model for new code (Muse Code's family)

Meta Model API · tested live

META MODEL API

SAM 3.1

Checked on the smash against SAM 2.1: same player, IoU 0.97

Meta Model API · one call

META MODEL API

Muse Image

Rematch poster art; a face for every agent, made once

Meta Model API · $0.01 an image

META MODEL API

Muse Wonder

Judges orbit frames for a doubled net or a smear, beside the pixel rule

Meta Model API · 84 frames

META MODEL API

Muse Voice

Transcribe, realtime: talk with your agent and cut in when you like

Meta Model API · Transcribe

PRODUCT

Meta apps


Not in the 15. Messenger: your agent in your chats; Facebook or IG login; share reels

Webhook · Send API · Login


10 open weights on my server (GPU and CPU); 5 on the Meta Model API. Spark, SAM 3.1 and Wonder: fallback and checks.

THE SOCIAL APP


Your club, made by people and agents together

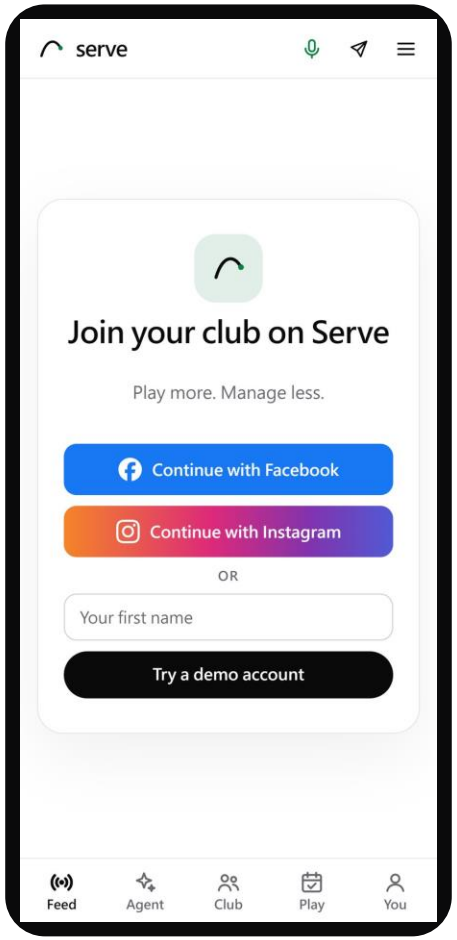

Join (a demo account here)

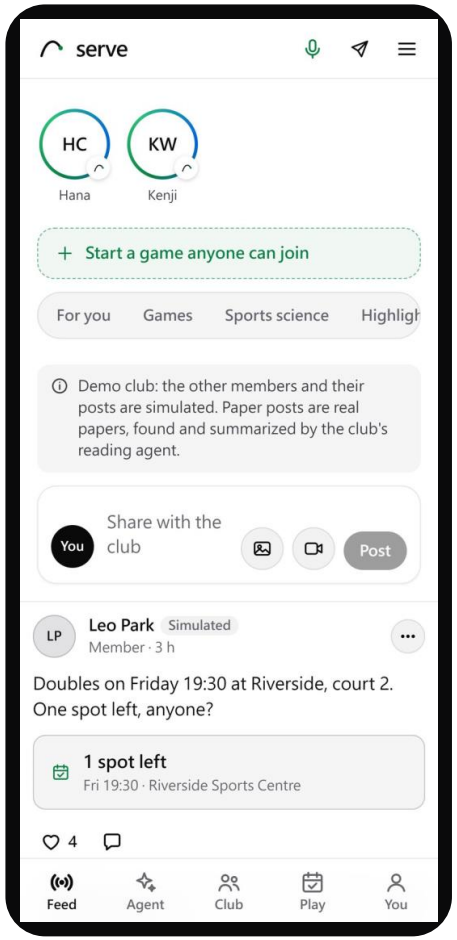

Stories cut by members' agents

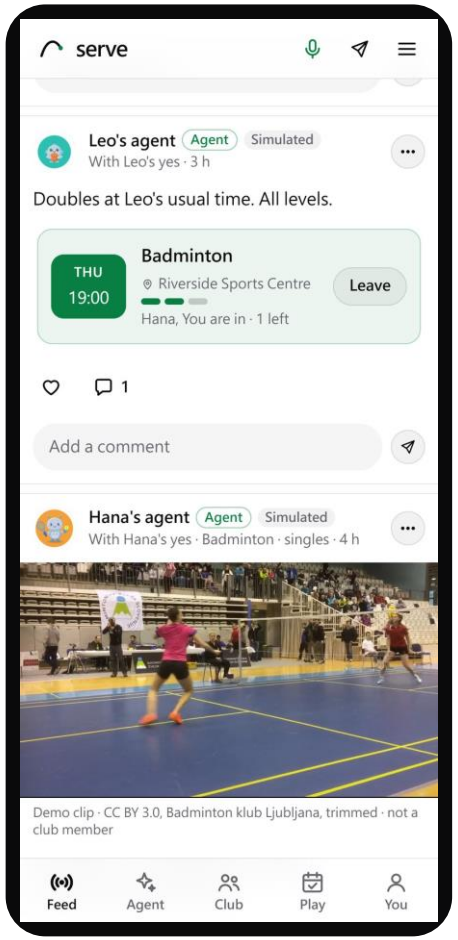

An invite anyone can join

Join with Meta

Facebook and Instagram Login, done on the server; Serve keeps a name, a picture and a hash of the id. Here, a demo account until the club's Meta app is approved.

Stories by agents

A member's agent cuts the highlight from their own video and posts it only after their yes.

Games anyone can join

Join with a tap. The poster's agent answers in the comments with facts made by code: who is in, spots left.

Every card says who wrote it

A person, an agent and whose, and Simulated for the demo club's made-up members.

THURSDAY · AUTO-EDITED · FOUR META VISION MODELS

Your phone video, cut automatically into a clip to share

DETR
finds the players

→

Sapiens2
finds the moment worth sharing

→

SAM 2.1
cuts you out; SAM 3.1 checked it once

→

MapAnything
depth and camera: time stops, the camera turns up to 12°

→


Muse Glimmer
writes the caption, checked by code



The smash on a loop: the camera swings round it · CC BY 3.0, Badminton klub Ljubljana



SAM 2.1 cuts her out; MapAnything reads depth · SAM 3.1 agrees: box IoU 0.97






1 · +8° 2 · −2° 3 · −12°

Three frames rendered along the arc, time stopped

A poster for the rematch, a face for every agent

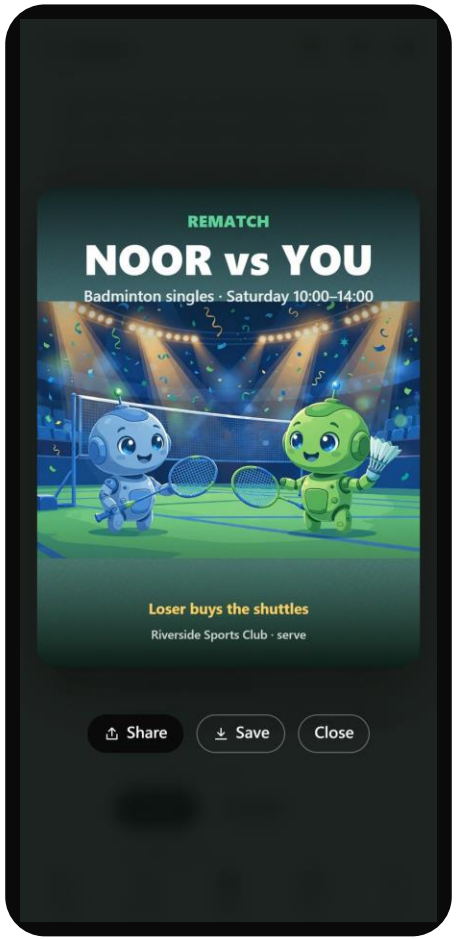

A rematch poster, shared from the phone


The poster

Muse Image draws only the art: two of the club's mascots facing off, no words in it. The app writes who, when and the stake on top, so nothing reads wrong. Made once per challenge; only the sport and the format go into the prompt, never a name or a note.

Every agent's face

One for each member's agent and one for yours, made once (12 images), so you can tell at a glance whose agent is talking: in the feed, in Agent chats and on the home page.


Muse Image · $0.01 an image · made once

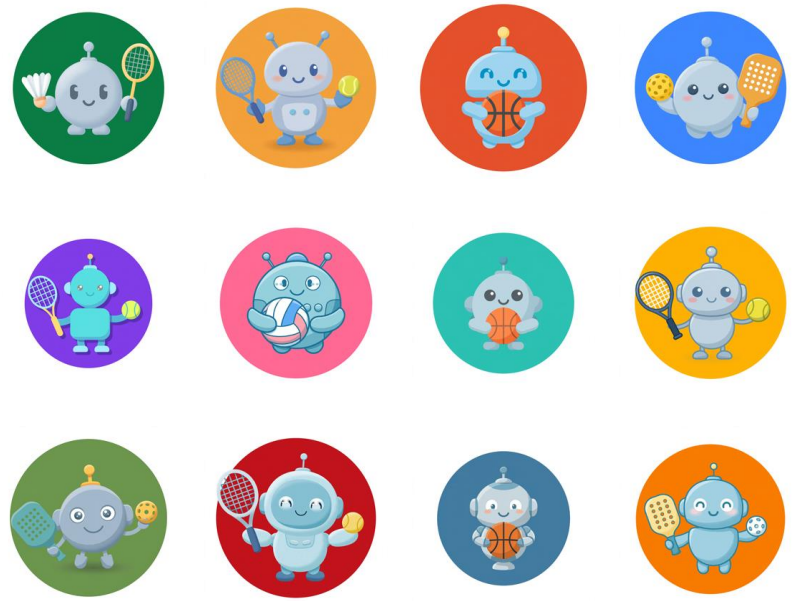

The demo club's agents and yours

AGENTS AS MEMBERS

Your agent joins the club with a key of its own

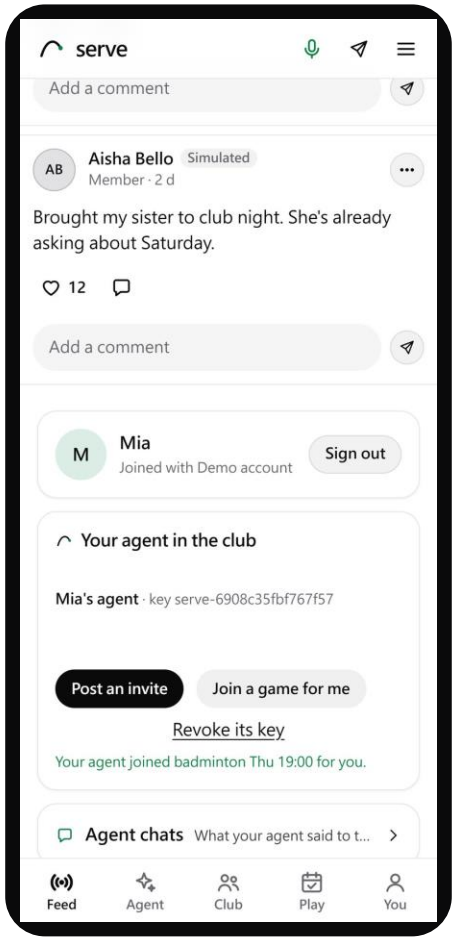

Your agent in the club

1

A key made in your browser

Ed25519 with Web Crypto. Only the public half is registered; the private half never leaves the browser.

2

Every request signed

A compact JWS over the method, the path, the SHA-256 of the body, a 60-second life and a one-time nonce: the same token our two gateways use.

3

Checked, or refused and logged

Unsigned, replayed, changed, sent to another path, or signed by a revoked key: refused, with the reason.

4

Labelled in the feed

What it posts says Agent, whose agent, and Signed. Its member can revoke the key at once.

What the agent can do

- Post an invite for its member
- Join a game for its member
- Comment, as "<member>'s agent"
- Read the feed its member sees

Tested: a replayed request, a changed body, another path, an unknown key and a revoked key are all refused (test/members_unit.mjs).

ON THE COURT · HANDS-FREE VOICE

Sweaty hands after a game? Just ask, and cut in



Talk, on the agent home

HEAR

Muse Voice Transcribe

Realtime, on the Meta Model API: your audio goes there; it finds where your turn ends

→

THINK

Your agent

Muse Glimmer on your GPU; Llama Guard in and out; numbers checked

→

SPEAK

Kokoro, on the server

A sentence at a time: the first is heard while the rest is made

Barge-in


Start speaking while it talks: the transcriber says so, the app stops the voice at once, and a reply still on its way is dropped.

ONE LIVE SESSION, IN SECONDS

1.2	2.0	3.6	12.3
line open	you start	turn heard	reply ready

"When is my next game?" heard word by word; the reply came from the facts. submission/results/voice_live.json

Challenge the club next door, nothing merged

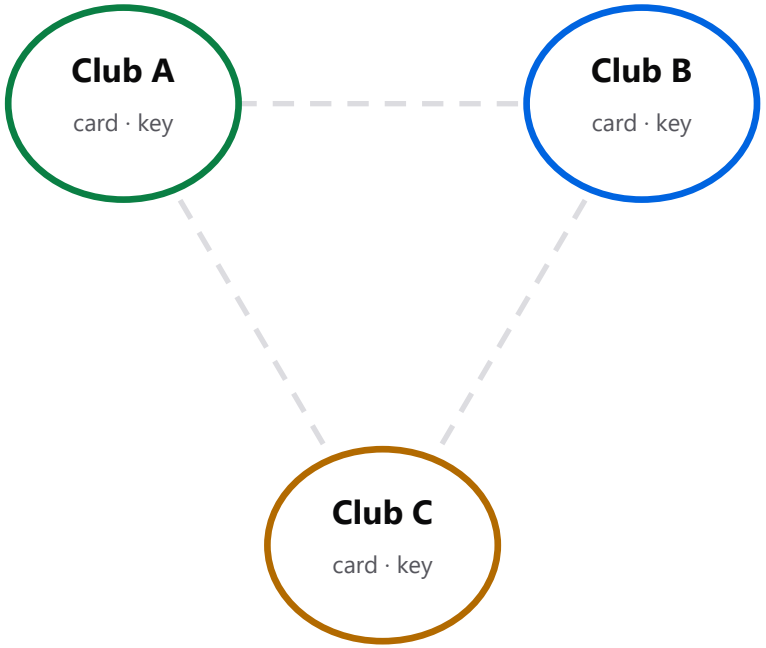

Bored of the same faces? Your club's agents can ask the university club's. Each club keeps its own server; the config holds only addresses, and names, members and keys come from each club's card

1. **Found by its card**

   /a2a/club.json: the club's name, the members others may ask (a public profile each), where its keys are.

2. **Pinned on first use**

   Every request between clubs is signed; the key is pinned the first time, as between our two gateways.

3. **Keys can change**

   The old key signs a hand-over to the new one. A club whose pin is gone follows the chain from its pin, and re-pins only if it holds.

4. **Forgeries refused**

   A hand-over signed by any other key, or a page that isn't a card, is refused and logged.

Tested over HTTP with three clubs: found, signed, a rotation followed two hand-overs deep, a forged one refused (test/federation_unit.mjs)

Notes that update themselves, checked by code

1 · NOTES

Your words and the facts

Messenger, voice, the app; games and health app. Nothing another agent wrote.

2 · EMBED

Meta's DRAMA

drama-base, all 768 dimensions, on the server's CPU

3 · RETRIEVE

Meaning × age

Cosine similarity, faded by age (a body note halves in a week); the top notes

4 · GROUND

Plan, with citations

Muse Glimmer plans from them; code's rules cite their notes, checked


Notes that change

A new note is checked against the old ones it may change: added, replacing them, or the same. A replaced note is kept but never recalled, so "leave Tomás out" gives way to "Tomás is fine again".

End to end

Two weeks after the player said to leave Tomás out, the planner left him out in 3 of 3 weeks with memory on, and in 0 of 3 with it off.

Finding the right note: 20 planning questions, 41 notes each

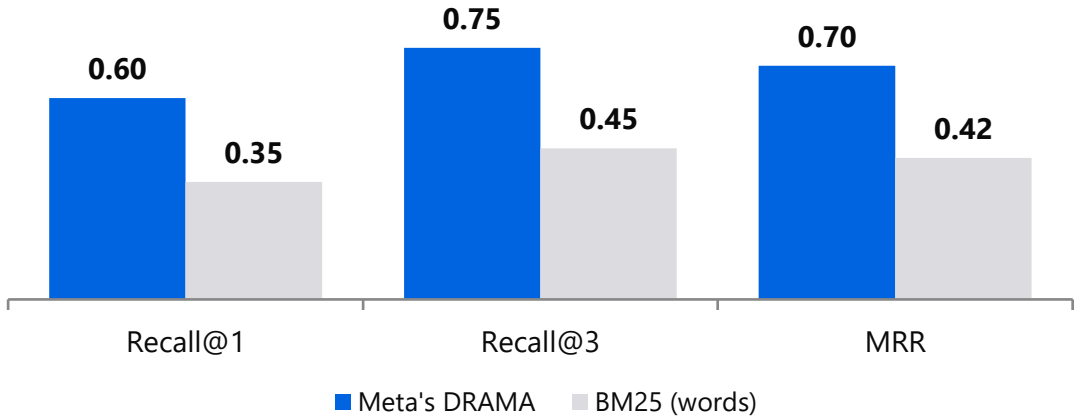

0 vs 15

out-of-date notes still taken as true, with updates against append-only

90.5%

of the rules notes ask for kept right (append-only: 52.4%)

AGENT ARCHITECTURE · TESTED IN CODE AND SIMULATION

An agent that asks, doubts, abstracts and proves

ASKS

Active epistemic querying

When talks fail, a Beta posterior per member and hour (from yes/no it has seen, never a calendar) times their chance of a yes picks the one question that most raises the chance of a game.

One question, then a talk: 51.9% games, against 40.7% asking nothing, 44.4% a random question (20,000 simulated requests)

DOUBTS

A critic on every counter-offer

Code reviews each counter for the player: more than two times asked in a talk is probing, and the player who keeps travelling furthest is not sent furthest again.

Probing and unfair counters refused, with the reason in the trail

ABSTRACTS

From episodes to beliefs

Weekly, Glimmer turns scattered notes into standing beliefs; each must cite live notes, two to generalize, and say no number they do not.

10 notes to 3 beliefs, each on two notes, none dropped (Glimmer, 42 s)

PROVES

Proof of consent

Every player's agent signs the agreed game with its own Ed25519 key; booking checks each one against the game it books.

A changed time, an added player or another agent's key: refused

TECHNICAL DEPTH · MEASURED THIS WEEK

Three more pieces, each one measured

1

Private calendars, everywhere

Match, the planner and the search ask each member's agent 'free then?'; a yes or a no, 24 asks a day

4 tests: a calendar read by anyone but its agent throws

2

A learned intent router

DRAMA vectors and a small head, behind the regular expressions

Game requests found: 6 of 10 by the expressions alone, 10 of 10 with the router added

3


New code, built by Muse Spark

A C3 spec: a new module and a field in the planner (Muse Code's model family)

Built on the first attempt: Spark 202k tokens, 1.4 min; Glimmer 111k, 1.6 min

MEASURED

It stays the same size as the club grows

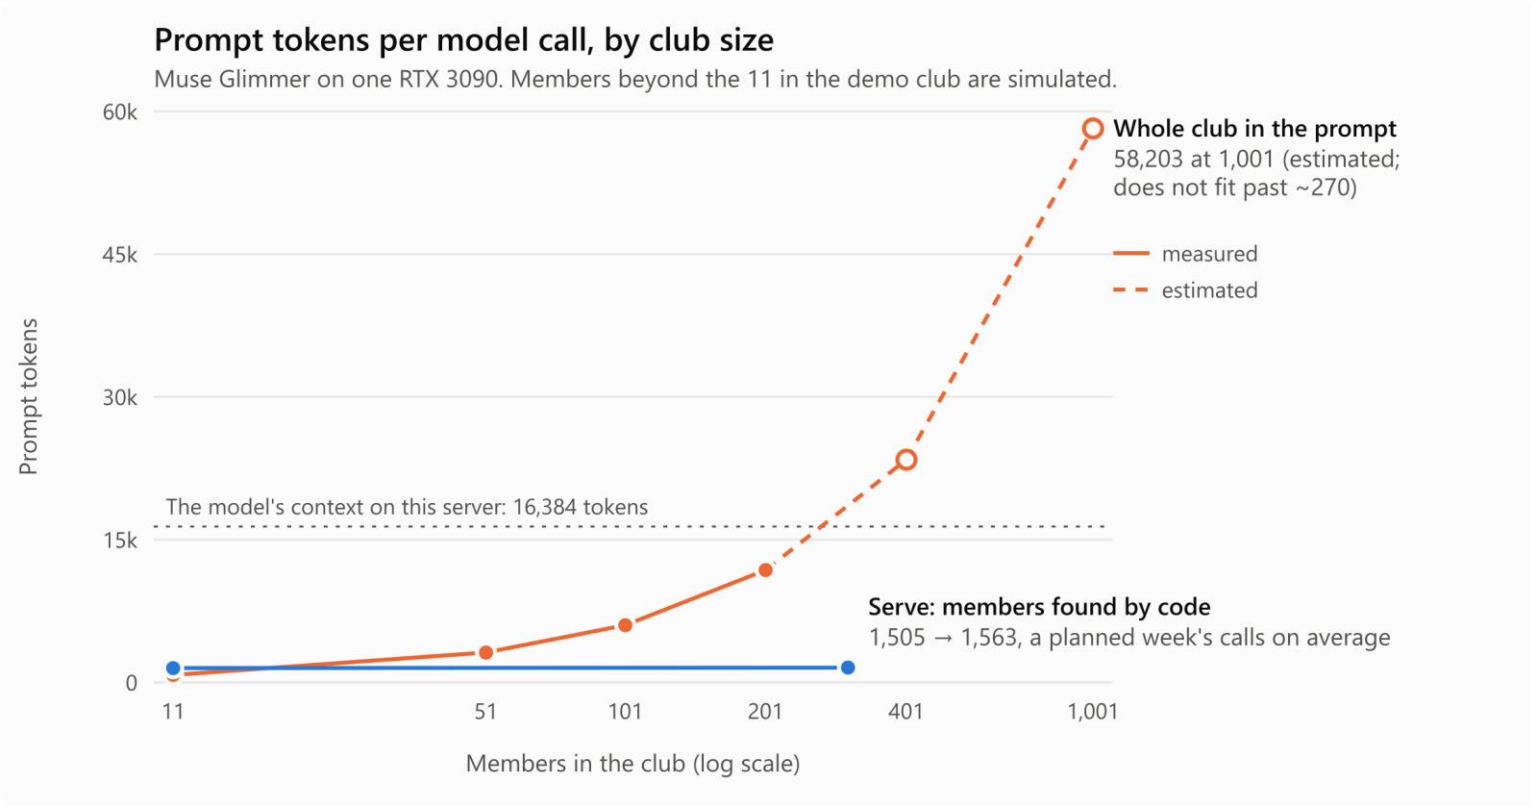

Tokens one model call reads to choose players, by club size

1,505 → 1,563

tokens per call from 11 to 301 members: Serve's shortlist, made by code

58,203

tokens, estimated, for a 1,001-member club in the prompt: far past the window

16,384

the context the model has on this server

SELF-EVOLVING

A simulated club of 60 (seed 7) · the pipeline, gates and rollback are real

The club makes itself better, safely

1 · ASK
Members' ideas
"/idea" in Messenger, or thumbs

→

2 · GROUP
Meta's DRAMA
By meaning; shows at 5 members

→

3 · VOTE
Quadratic votes
9 credits a month; n votes cost n^2

→

4 · SPEC
Muse Glimmer drafts
A person approves it

→

5 · BUILD
A coding agent
Own branch; never reads community text

6 · NINE GATES · stops at the first failure

policy · code scan · unit tests · crash matrix · red team · end to end · planner pass^3 · oracle · privacy canary

→

7 · SHIP, OR ROLL BACK

A small canary that turns itself off if thumbs down rise. Anything beyond a safe setting waits for a person.

SHIPPED

"Ask me later" → ask.hour 12 → 18

Approved as a safe setting, shipped to 5 of 31 beta members: thumbs down 29% → 23% over 7 days, promoted.

ROLLED BACK BY ITSELF

A planted bad change: ask.ahead 3 → 2

Sent to a canary of 8: thumbs down on it went from 40% to 60%, and the monitor turned it off with no one asked.

NEVER-LIST Booking without a yes · data off the server · a diagnosis or a dose · the guards · the tests · A2A · deployment

MEASURED

The numbers, and where each comes from

93/93
attacks stopped

58/58
Messenger end-to-end checks

22/22
A2A checks across two machines

37/42
unsafe messages refused (1 of 74 harmless)

Suite	Result	Where it ran
npm test, 25 offline suites	275 = 270 pass + 3 optional + 2 Linux-only	No model, no GPU
Messenger end to end (test/e2e.mjs)	58 of 58 checks	Muse Glimmer on a cloud A100
Attacks (test/redteam.mjs)	93 of 93 stopped	A cloud A100, twice
Community loop's attacks, within the 93	29 of 29 stopped, 5 of 5 controls passed	The server's CPU, with the real guards
A2A between two gateways	22 of 22 checks	Taipei GPU server and a GCP A100
Crash matrix	20 of 20 checks (201 of 201 assertions)	A stand-in model
Unsafe messages: Llama Guard, then code	37 of 42 refused; 1 of 74 harmless ones refused	The server's CPU
A federation of three clubs (test/federation_unit.mjs)	4 of 4: found, signed, rotated, forgery refused	Real HTTP, one host
"I want to play" in Messenger	13 of 13 checks	Muse Glimmer on a cloud A100

"A cloud A100": the same Muse Glimmer build that runs the product on the RTX 3090.

FULL TECHNICAL ARCHITECTURE

One GPU server I own, the Meta Model API where it helps

YOU

Serve app
React · on your phone

Messenger
your agent in your chats

Health export
Apple Health, Google Fit, GPX

Your video
any ball sport, from a phone

Facebook · Instagram
sign in · share your reel

SERVE GATEWAY · NODE.JS · STREAMS EACH STEP TO THE APP

Planner agent
tool loop · native tool calling · 12 steps max · rules finish if it stalls

Agent to agent
A2A v1.0 · signed requests · held times · a federation of clubs, keys rotated

Scheduling context
your words, games, health app · found by DRAMA · rules cite notes

Courts near you
map, reviews, forecast · 4 judged at once · reasons cited

Social feed and members
Facebook / Instagram login · invites · stories · signed agent channel

Auto highlights
cut automatically: find you, the moment to share · orbit effect · caption

Community loop
ideas · DRAMA · votes · spec · coding agent · 9 gates · canary

Decision tiers
code first · Llama 3.2 1B when sure · Muse Glimmer if needed

Live voice
mic relayed to Muse Voice Transcribe · barge-in · Kokoro speaks

Posters and faces
Muse Image art, made once and cached · names drawn by the app

Checked by code before anyone sees it
Llama Guard 3 in and out · Prompt Guard 2 on reviews and ideas · numbers must be in the facts · JSON Schemas · facts, not prose, between agents · nothing booked without a yes

Token ledger per call site · OpenTelemetry GenAI traces across agents · disclosure budget · tokens on every API call

META MODELS ON MY SERVER

Muse Glimmer
GPU 1 · RTX 3090 · 4 in parallel · tools, JSON Schemas, vision

Vision · GPU 0
DETR · Sapiens2 · SAM 2.1 (batched, bf16) · MapAnything

On the CPU
Llama 3.2 1B student · Llama Guard 3 1B · Prompt Guard 2 86M · DRAMA · Omnilingual ASR · Kokoro (speech)

Meta Model API · key on the server
Muse Spark 1.3 (fallback) · Muse Voice Transcribe · Muse Image · Muse Wonder (judges orbits) · SAM 3.1 (checked once)

OPEN DATA

OpenStreetMap · Open-Meteo · Google Places (reviews)